


BLIND RIVET NUTS FASTENERS SERIES

Threaded Insert nut

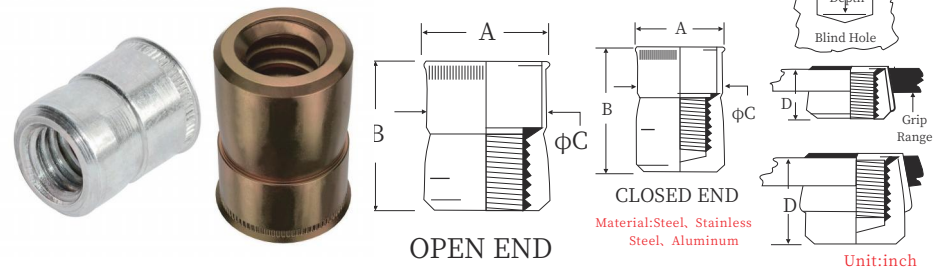


Thread Size	Type			Thread Code	Installation Hole Size				OPEN END				CLOSE END				Blind Hole Depth Min.
					Grip Range				A	B	ΦC Max.	D Ref.	A	B	ΦC Max.	D Ref.	
	.030-.090	.091-.124	.125-.186		.187-Over	+ .005	+ .015	+ .015									
#4-40	JX-TS	JX-TC	JX-TA	440	.188	.194	.194	.198	.211	.370	.1875	.205	.211	.660	.1875	.495	.400
#6-32	JX-TS	JX-TC	JX-TA	632	.219	.221	.228	.228	.240	.370	.2185	.205	.240	.675	.2185	.505	.400
#8-32	JX-TS	JX-TC	JX-TA	832	.250	.257	.266	.266	.269	.370	.2495	.205	.269	.675	.2495	.505	.400
#10-24	JX-TS	JX-TC	JX-TA	1024	.281	.290	.290	.297	.306	.370	.2805	.205	.306	.685	.2805	.520	.400
#10-32	JX-TS	JX-TC	JX-TA	1032	.281	.290	.290	.297	.306	.370	.2805	.205	.306	.685	.2805	.520	.400
1/4-20	JX-TS	JX-TC	JX-TA	0420	.375	.375	.386	.391	.400	.515	.3745	.275	.400	1.005	.3745	.760	.540

Unit:inch

Thread Size	Type			Thread Code	Installation Hole Size				OPEN END				CLOSE END				Blind Hole Depth Min.
	Steel	Stainless Steel	Aluminum		Grip Range				A +0.13	B +0.38	ΦC Max.	D Ref.	A +0.13	B +0.38	ΦC Max.	D Ref.	
M3x0.5	JX-TS	JX-TC	JX-TA	350	4.75	4.9	4.9	4.97	5.36	9.4	4.76	5.21	5.36	16.77	4.76	12.57	10.16
M4x0.7	JX-TS	JX-TC	JX-TA	470	6.35	6.5	6.74	6.74	6.83	9.4	6.34	5.21	6.83	17.15	6.34	12.83	10.16
M5x0.8	JX-TS	JX-TC	JX-TA	580	7.14	7.37	7.4	7.54	7.77	9.4	7.12	5.21	7.77	17.40	7.12	13.21	10.16
M6x1.0	JX-TS	JX-TC	JX-TA	610	9.52	9.52	9.8	9.92	10.16	13.08	9.51	6.99	10.16	25.53	9.51	19.30	13.72
M8x1.25	JX-TS	JX-TC	JX-TA	8125	12.7	12.7	13.09	13.09	13.41	15.62	12.69	8.26	13.41	27.05	12.69	19.56	16.26
M10X1.5	JX-TS	JX-TC	JX-TA	1015	14.28	14.28	14.68	14.68	14.94	18.92	14.26	9.91	14.94	36.83	14.26	27.81	19.56
M12X1.75	JX-TS	JX-TC	JX-TA	12175	19.05	19.44	19.84	20.05	20.32	23.75	19.01	12.32	20.32	NA	19.01	NA	24.38

Unit:mm

Elasti Neoprene Blind Nut

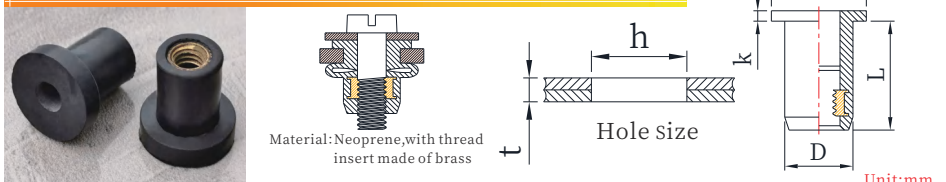


Unit:mm

Size	P/N	t	D	d _k	L	k	h	Shore A	Torque to turn
M3	JX-F-M3-NB-12.6	0.4-4.0	7.9	11.0	12.6	1.2	8.0	60	0.25-0.5
M4	JX-F-M4-NB-12.6	0.4-4.0	7.9	11.0	12.6	1.2	8.0	70	0.25-0.5
	JX-F-M5-NB-14.1	0.4-4.9	9.6	12.7	14.1	0.9	9.7	70	0.35-0.5
M5	JX-F-M5-NB-21.5	4.0-11.6	9.6	14.0	21.5	0.9	9.7	70	0.3-0.9
	JX-F-M5-NB-26.5	7.9-16.0	9.6	14.0	26.5	1.3	9.7	70	0.3-0.7
	JX-F-M5-NB-39	20.5-30.0	9.6	14.0	39.0	1.3	9.7	70	0.6-1.0
	JX-F-M6-NB-16	0.4-2.8	12.7	16.0	16.0	1.3	12.8	60	0.6-1.0
M6	JX-F-M6-NB-21.1	0.8-4.7	12.7	19.0	21.1	4.75	12.8	70	0.8-1.0
	JX-F-M6-NB-26.7	6.4-11.5	12.7	16.3	26.7	2.0	12.8	70	0.8-1.0
M8	JX-F-M8-NB-18.3	0.4-4.0	15.9	22.1	18.3	3.2	16.0	60	1.0-1.5
	JX-F-M8-NB-27.9	3.0-9.5	15.9	22.1	27.9	5.7	16.0	60	1.0-1.5

BLIND RIVET NUTS FASTENERS SERIES


Nylon Flat Head Insert nut

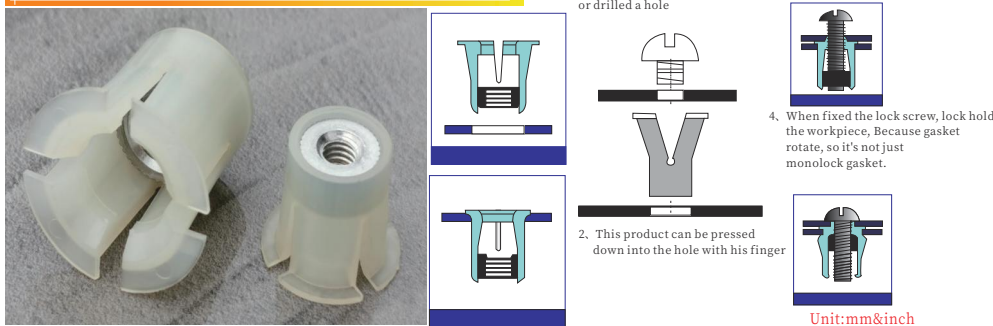

Unit:mm&inch

Thread Size	Part NO	L +0.02	T +0.05 -0.15	Body DIA -0.15	AVG Pullout lbs	Tightening Tarque in-lbs	Grip Range	Hole Size +0.15 -0	Min Length
M2.5x0.45	JX-NF-M2.5-8	8.0	0.75	6.4	100	15	0.8-1.2	6.4	8+Dim.c
M3x0.5	JX-NF-M3-9.6	9.6	0.75	8.0	140	20-30	1.3-2.0	8.0	9.6+Dim.c
M4x0.7	JX-NF-M4-12.7	12.7	0.75	10.3	220	20-50	2.1-2.4	10.3	12.7+Dim.c
M5x0.8	JX-NF-M5-12.7	12.7	0.75	10.3	220	20-50	2.1-2.4	10.3	12.7+Dim.c
M6x1.0	JX-NF-M6-15.9	15.9	0.75	12.7	275	30-100	2.5-3.2	12.7	15.9+Dim.c
M8x1.25	JX-NF-M8-19	19.0	0.75	14.3	320	40-100	3.3-4.0	14.3	19+Dim.c
4-40	JX-NF-440-8	8.0	0.75	6.4	100	5.0	0.8-1.2	6.4	8+Dim.c
6-32	JX-NF-632-9.6	9.6	0.75	8.0	140	20-30	1.3-2.0	8.0	9.6+Dim.c
8-32	JX-NF-832-12.7	12.7	0.75	10.3	220	20-50	2.1-2.4	10.3	12.7+Dim.c
10-24	JX-NF-024-12.7	12.7	0.75	10.3	220	20-50	2.1-2.4	10.3	12.7+Dim.c
10-32	JX-NF-032-12.7	12.7	0.75	10.3	220	20-50	2.1-2.4	10.3	12.7+Dim.c
14-20	JX-NF-0420-15.9	15.9	0.75	12.7	275	30-100	2.5-3.2	12.7	15.9+Dim.c
5/16-18	JX-NF-0518-19	19.0	0.75	14.3	320	40-100	3.2-4.0	14.3	19+Dim.c

J-X Flat Head JACK Blind rivet nuts

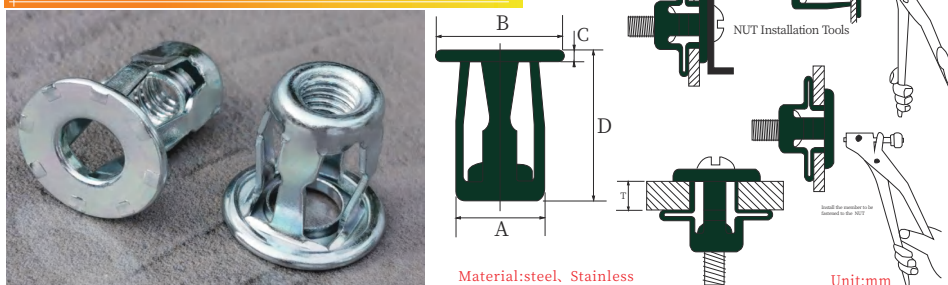

Material:steel, Stainless

Unit:mm

Thread Size	Part NO	Grip Range	Hole Size	Body DIA A	Head DIA B	Head Thickness C	Length D	Tightening Torque N.M
M4x0.7	JX-JK-M4-16.5	0.4-4.7	8.0-8.4	8.0	11.9	1.8	16.5	1.35
	JX-JK-M4-21.4	4.7-9.5	8.0-8.4	8.0	11.9	1.8	21.4	
M5x0.8	JX-JK-M5-18.2	0.4-4.7	9.7-10.1	9.7	13.5	1.8	18.2	1.25
	JX-JK-M5-22.5	4.7-9.5	9.7-10.1	9.7	13.5	1.8	22.5	
M6x1.0	JX-JK-M6-18.6	0.4-4.7	11.1-11.5	11.1	15.9	1.8	18.6	3.6
	JX-JK-M4-23.3	4.7-9.5	11.1-11.5	11.1	15.9	1.8	23.3	