


JX Fasteners for Metal Sheets and Panels Series

Locating Pin, Spring-loaded

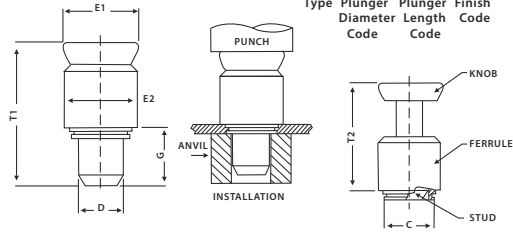

Part Number Designation
 JX-PT - 56 - 61 - CN
 ↓ ↓ ↓
 Type Plunger Plunger Finish
 Diameter Length Code Code
 Code


All dimensions are in inches

UNIFIED	Type		Plunger Diameter Code	Plunger Length Code	Min. Sheet Thickness	Hole Size In Sheet +.003	C Max.	D Max.	E1 ±0.1	E2 ±0.1	G ±0.15	T1 ±0.15	T2 Nom
	Steel	Stainless Steel											
JX-PT	JX-PTS	56	61	.060	.328	.327	0.25	.453	.405	.335	.807	.740	

All dimensions are in millimeters

METRIC	Type		Plunger Diameter Code	Plunger Length Code	Min. Sheet Thickness	Hole Size In Sheet +.003	C Max.	D Max.	E1 ±0.25	E2 ±0.25	G ±0.4	T1 ±0.4	T2 Nom
	Steel	Stainless Steel											
JX-PT	JX-PTS	56	61	1.53	8.33	8.31	6.35	11.5	10.3	8.5	20.5	18.8	

Captive Panel Screw, Screw Head, Spring-loaded, Flare Mount - Metric

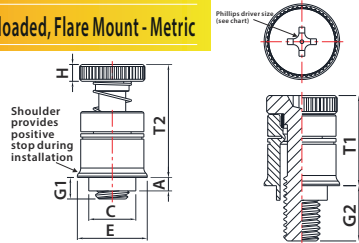

Part Number Designation
 JX-PF7MF - M3 - CN
 ↓ ↓ ↓
 Type Thread Finish
 and Material Code Code
 Material:Steel

Part Number Designation
 JX-PF7MFS - M3 - NA
 ↓ ↓ ↓
 Type Thread Finish
 and Material Code Code
 Material:Stainless Steel

METRIC	Thread Size	TYPE		Thread Code	Min. Sheet Thickness	Hole Size in Sheet +0.13	G1 ±0.64	G2 ±0.64
		Steel	Stainless Steel					
M3x0.5	JX-PF7MF	JX-PF7MFS	M3	0.79	4.75	1.02	5.33	
M3x0.5	JX-PF7MF	JX-PF7MFS	M3	0.79	4.75	2.54	6.86	
M4x0.7	JX-PF7MF	JX-PF7MFS	M4	1.52	6.76	1.02	6.1	
M4x0.7	JX-PF7MF	JX-PF7MFS	M4	1.52	6.76	2.54	7.62	

All dimensions are in inches

UNIFIED	Thread Size	TYPE		Thread Code	Min. Sheet Thickness	Hole Size in Sheet +0.13	G1 ±0.64	G2 ±0.64
		Steel	Stainless Steel					
.112-40 (#4-40)	JX-PF7MF	JX-PF7MFS	440	.031	.187	.040	.210	
.112-40 (#4-40)	JX-PF7MF	JX-PF7MFS	440	.031	.187	.100	.270	
.138-32 (#6-32)	JX-PF7MF	JX-PF7MFS	632	.060	.213	.040	.240	
.138-32 (#6-32)	JX-PF7MF	JX-PF7MFS	632	.060	.213	.100	.300	
.164-32 (#8-32)	JX-PF7MF	JX-PF7MFS	832	.060	.266	.040	.240	
.164-32 (#8-32)	JX-PF7MF	JX-PF7MFS	832	.060	.266	.100	.300	


Remark:We only show part of the specifications, we can also produce various sizes according to the customer's requirements

JX Fasteners for Metal Sheets and Panels Series

JX-PTL2 Locating Pin, Spring-loaded Assemblies



Part Number Designation
 JX-PTL2 - 04 - CN
 ↓ ↓ ↓
 Type Plunger Plunger Finish
 Diameter Length Code Code
 Code



Reverse side of sheet is flush when plunger is retracted.
 Quick lockout feature holds plunger in retracted position.




All dimensions are in inches.

UNIFIED	Type	Plunger Diameter Code	Plunger Length Code	Min. Sheet Thickness	Hole Size In Sheet +.003 -0.000	C Max.	D +.000 -0.005	E1 ± 010	E2 ± 010	G ± 010	H ± 010	T1 ± 010	T2 Nom.	TR ± 005	Min. Dist. Hole C/L To Edge
JX-PTL2NS	04	4	.060	.328	.327	.250	.50	.406	.310	.17	.510	.780	.350	.34	

All dimensions are in millimeters.

METRIC	Type	Plunger Diameter Code	Plunger Length Code	Min. Sheet Thickness	Hole Size In Sheet +0.08	C Max.	D -0.13	E1 ±0.25	E2 ±0.25	G ±0.25	H ±0.25	T1 ±0.25	T2 Nom.	TR ±0.13	Min. Dist. Hole C/L To Edge
JX-PTL2NS	04	4	1.53	8.33	8.31	6.35	12.7	10.3	7.87	4.32	12.95	19.81	8.89	8.64	

JX-CSS, JX-CSOS 不锈钢压铆螺柱 Stainless Steel Standoffs

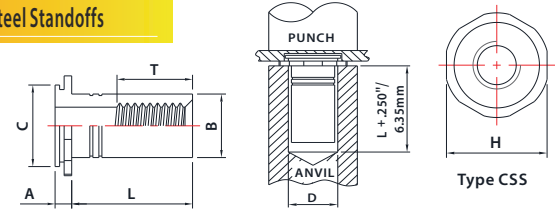

All dimensions are in inches.

UNIFIED	Thread Size	Type	Thread Code	Screw Length Code L (Length code is in 16ths of an inch) +.002-.005								Min. Sheet Thickness	Blind Mounting Hole Dia. +.003 -0.000	Min. Depth of Blind Hole(1)	Min. Depth of Full Thread T (1)	A Max.	B Max. (4)	C Max.	H Nom.	Min. Dist. Hole C/L To Edge
				.187	.250	.312	.375	.500	.625	.750	1.00									
.112-40 (#4-40)	JX-CSS	JX-CSOS	440	3(2)	4	5	6	8(3)	10 ^{NS} (3)	12 ^{NS} (3)	16 ^{NS} (3)	.062	.213	.043	.188	.043	.165	.212	.250	.188
.138-32 (#6-32)	JX-CSS	JX-CSOS	632	3(2)	4	5	6	8(3)	10(3)	12(3)	16 ^{NS} (3)	.062	.290	.043	.250	.043	.213	.289	.312	.219
.164-32 (#8-32)	JX-CSS	JX-CSOS	832NS	3(2)	4	5	6	8(3)	10(3)	12(3)	16(3)	.062	.312	.043	.250	.043	.245	.311	.344	.250
.190-32 (#10-32)	JX-CSS	JX-CSOS	032NS	3(2)	4	5(2)	6(2)	8	10(3)	12(3)	16(3)	.062	.344	.043	.375	.043	.290	.343	.375	.281
.250-20 (#1/4-20)	JX-CSS	JX-CSOS	0420NS	3(2)	4	5(2)	6(2)	8	10	12(3)	16(3)	.062	.390	.043	.375	.043	.354	.389	.438	.375

All dimensions are in millimeters.

METRIC	Thread Size	Type	Thread Code	Screw Length Code L (Length code is in millimeters) +0.05-0.13								Min. Sheet Thickness	Blind Mounting Hole Dia. +.003 -0.000	Min. Depth of Blind Hole(1)	Min. Depth of Full Thread T (1)	A Max.	B Max. (4)	C Max.	H Nom.	Min. Dist. Hole C/L To Edge
				1.6	2.0	2.5	3.0	4.0	5.0	6.3	8.0									
M3x0.5	JX-CSS	JX-CSOS	M3	4(2)	6(2)	8(5)	10(3)	12 ^{NS} (3)	16 ^{NS} (3)	20 ^{NS} (3)	25 ^{NS} (3)	1.6	5.41	1.1	5	1.1	4.2	5.39	6.35	4.8
M4x0.7	JX-CSS	JX-CSOS	M4	4 ^{NS} (3)	6(2)	8	10(5)	12(3)	16(3)	20 ^{NS} (3)	25 ^{NS} (3)	1.6	7.92	1.1	6.5	1.1	6.23	7.9	8.74	6.4
M5x0.8	JX-CSS	JX-CSOS	M5NS	4(2)	6(2)	8(2)	10	12	16(3)	20(3)	25(3)	1.6	8.74	1.1	9.6	1.1	7.37	8.72	9.53	7.2
M6x1	JX-CSS	M6NS	4(2)	6(2)	8(2)	10	12	16(3)	20(3)	25(3)	2.4	9.9	1.91	9.6	1.91	9	9.89	11.11	9.5	
																				2.4

Remark:We only show part of the specifications, we can also produce various sizes according to the customer's requirements